

FIG. 1

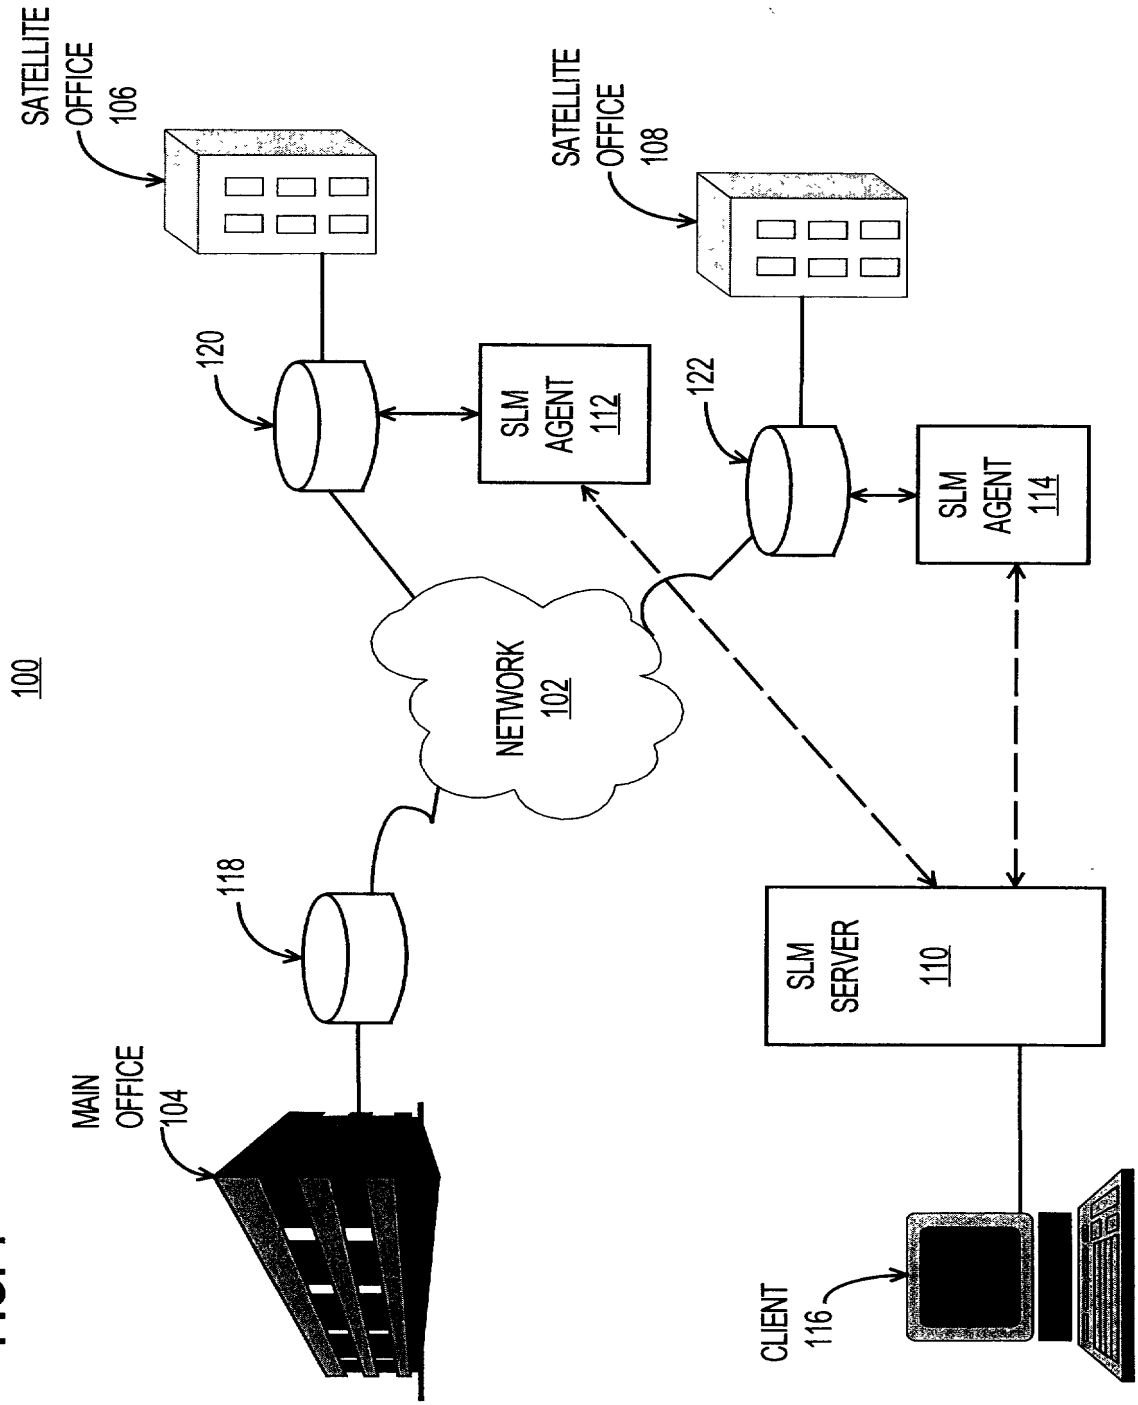


FIG. 2A

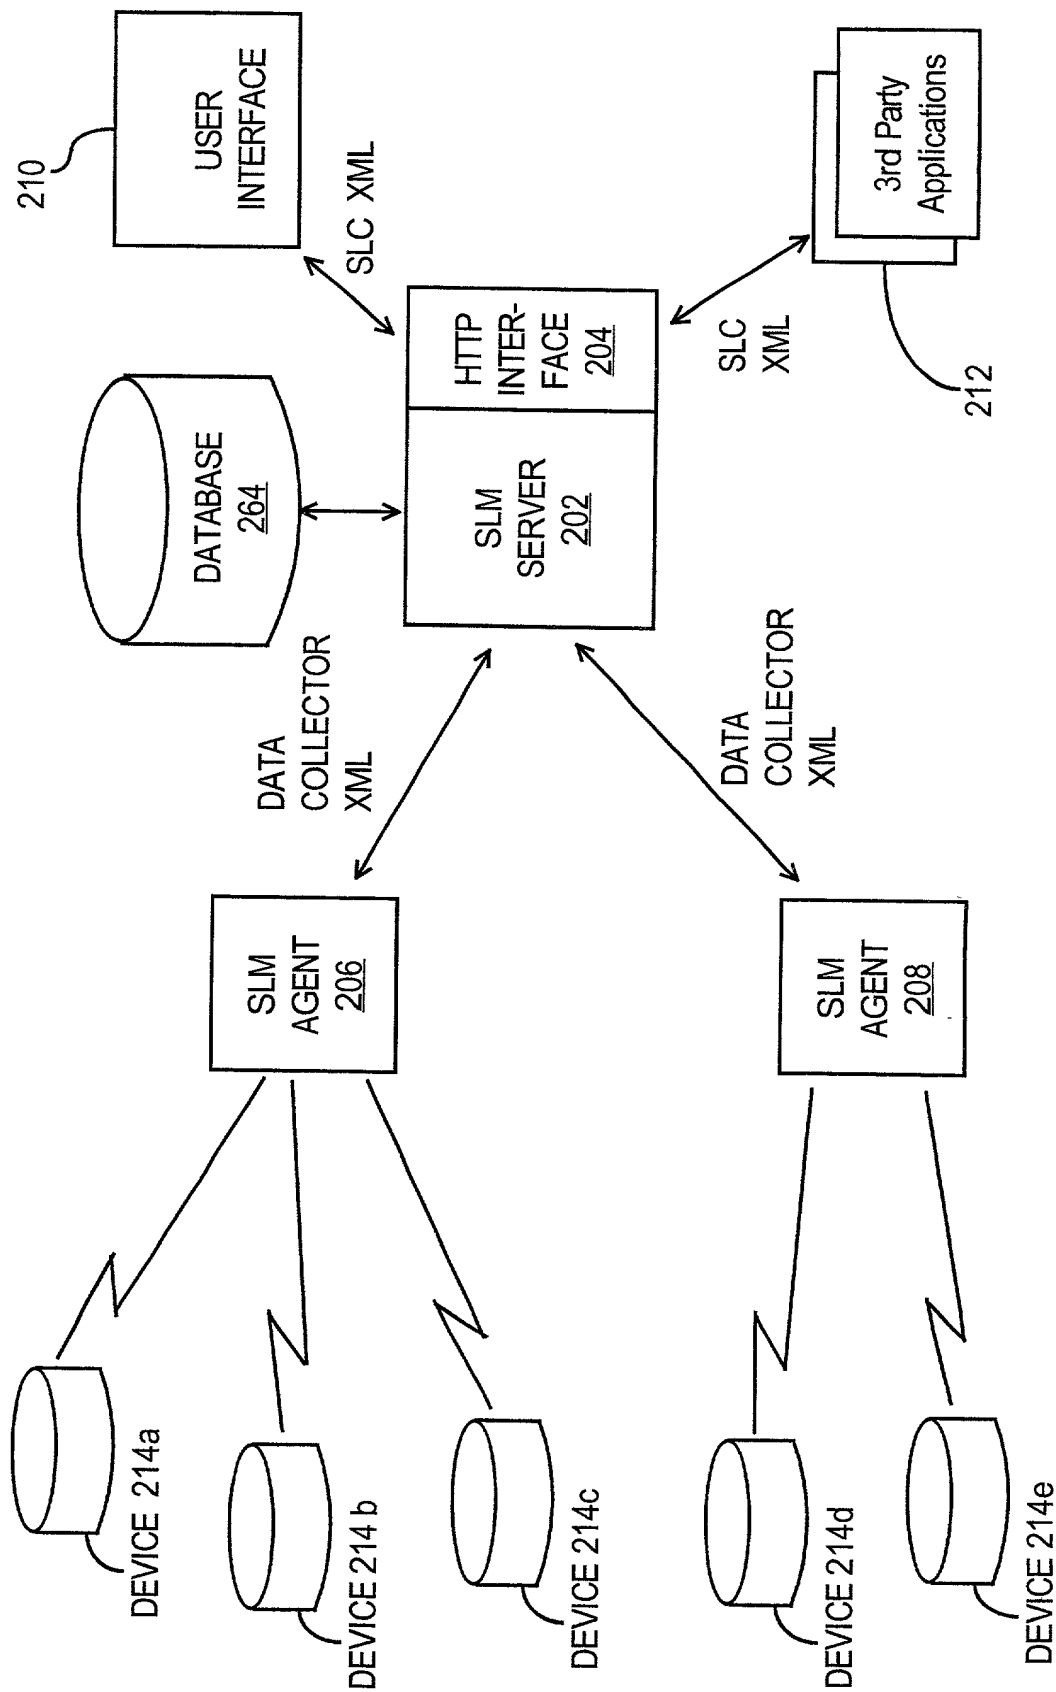


FIG. 2B

250

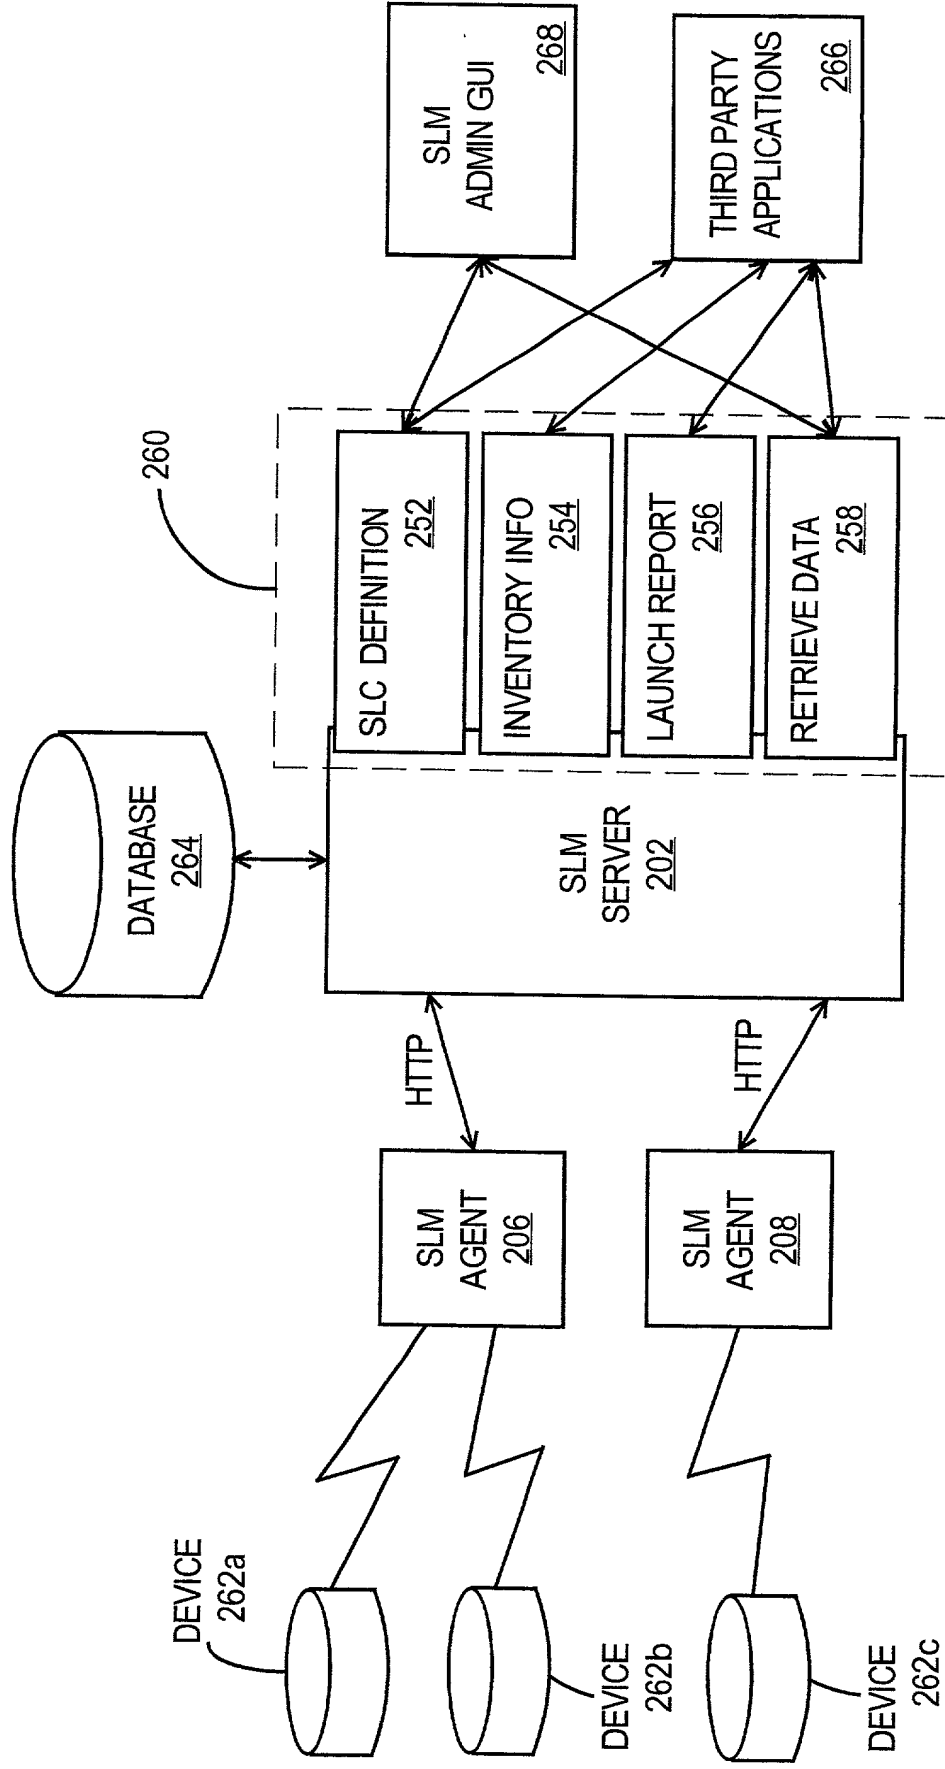


FIG. 3A

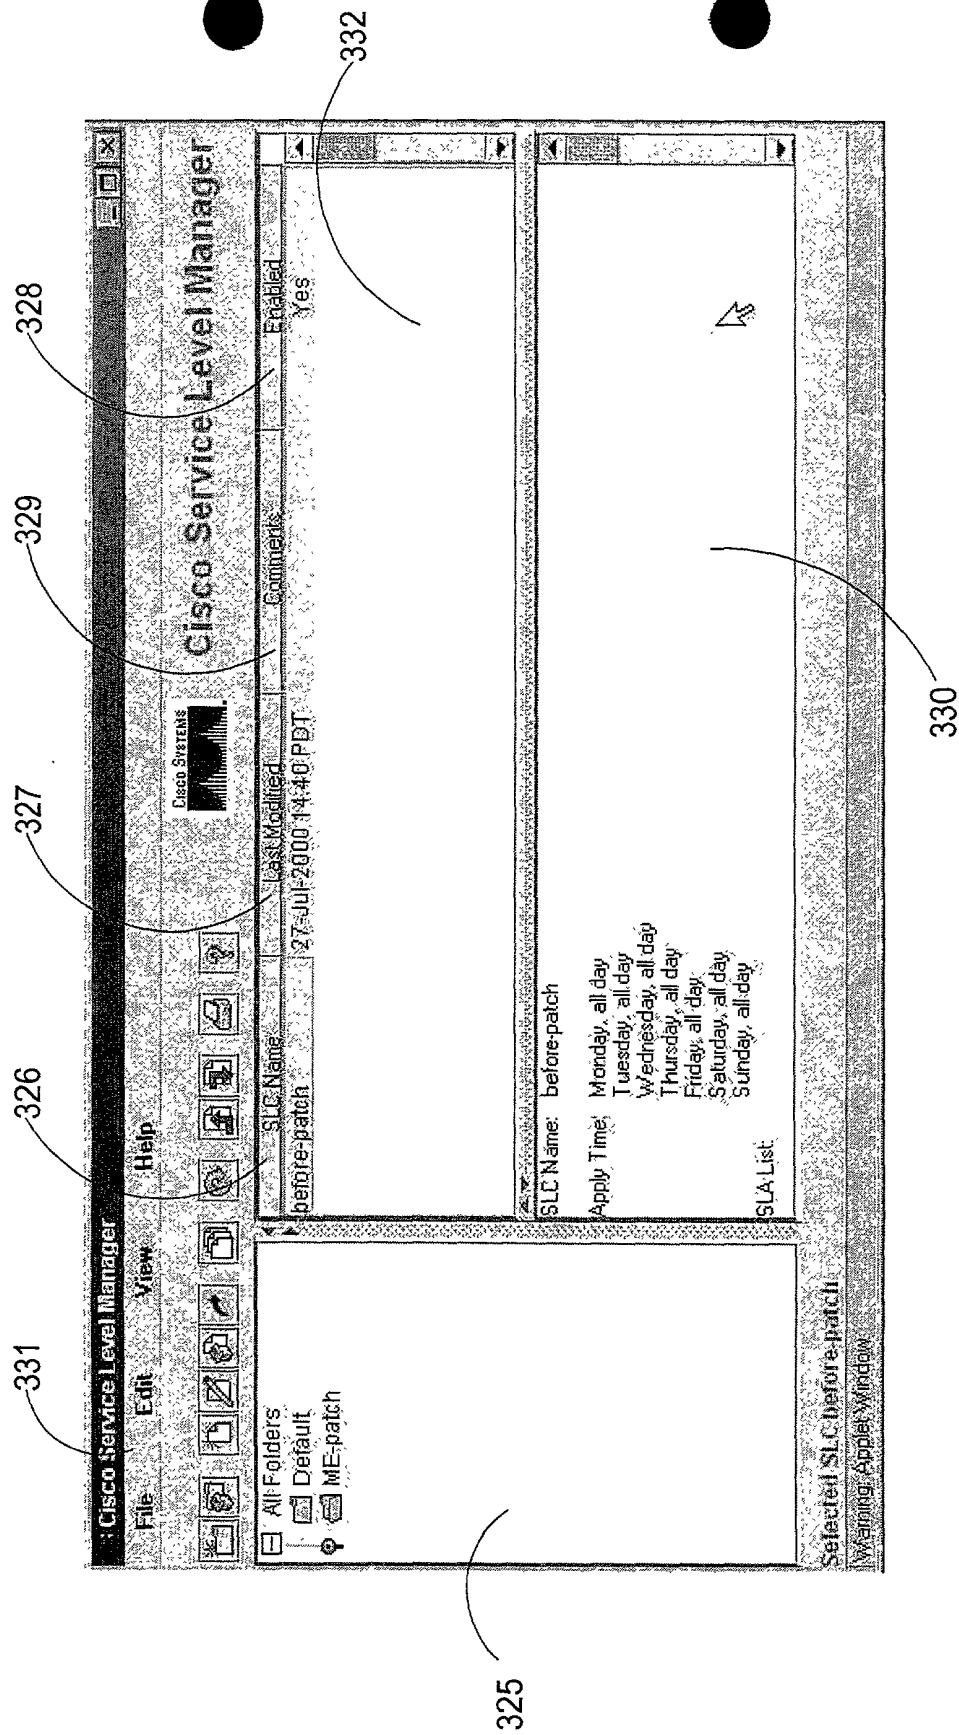


FIG. 3B

302

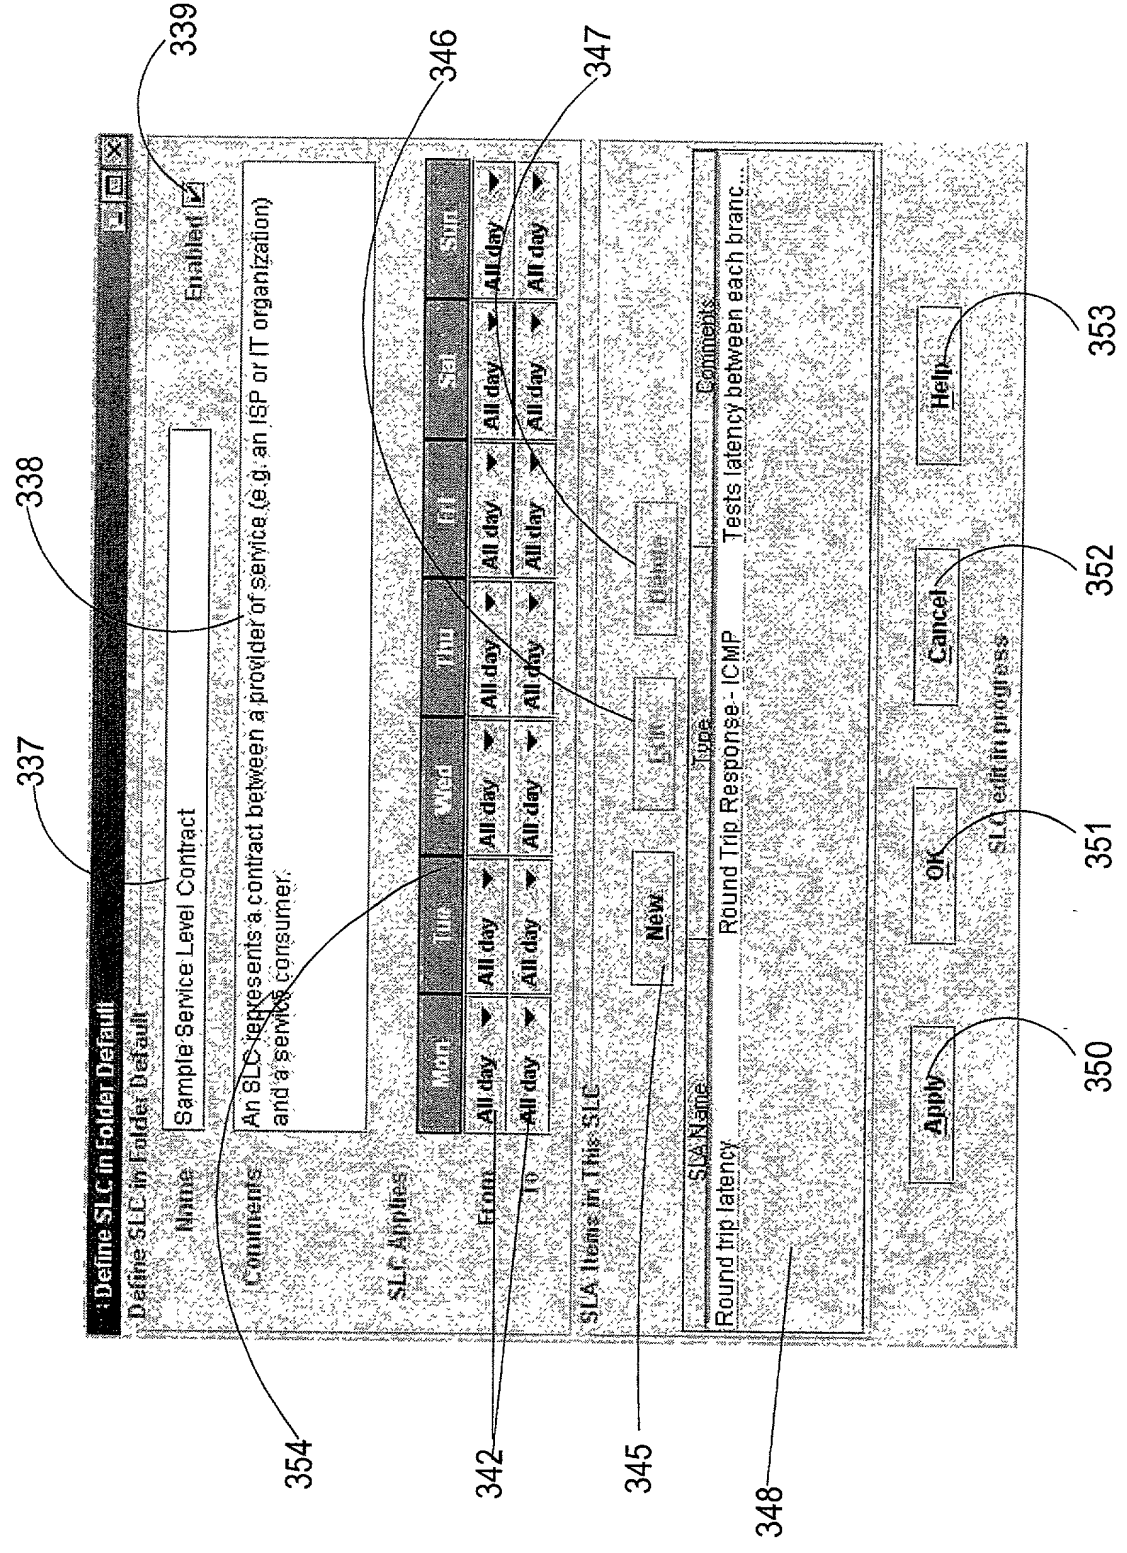


FIG. 3C

303

Define SLA - Round-Trip Response

**SLA Wizard**

☒ 1. Define SLA Name

☐ 2. Select Device Pairs

☐ 3. Define Thresholds

**Legend**

☒ Valid Data

☒ Invalid Data

☐ No Data

**Define SLA**

Name: Round trip latency

Comments: Tests latency between each branch office

Sampling Interval: 5 minutes

Round-Trip Response: ICMP Echo

Payload Size: 28

Type of Service: 0

Back Next Cancel Help

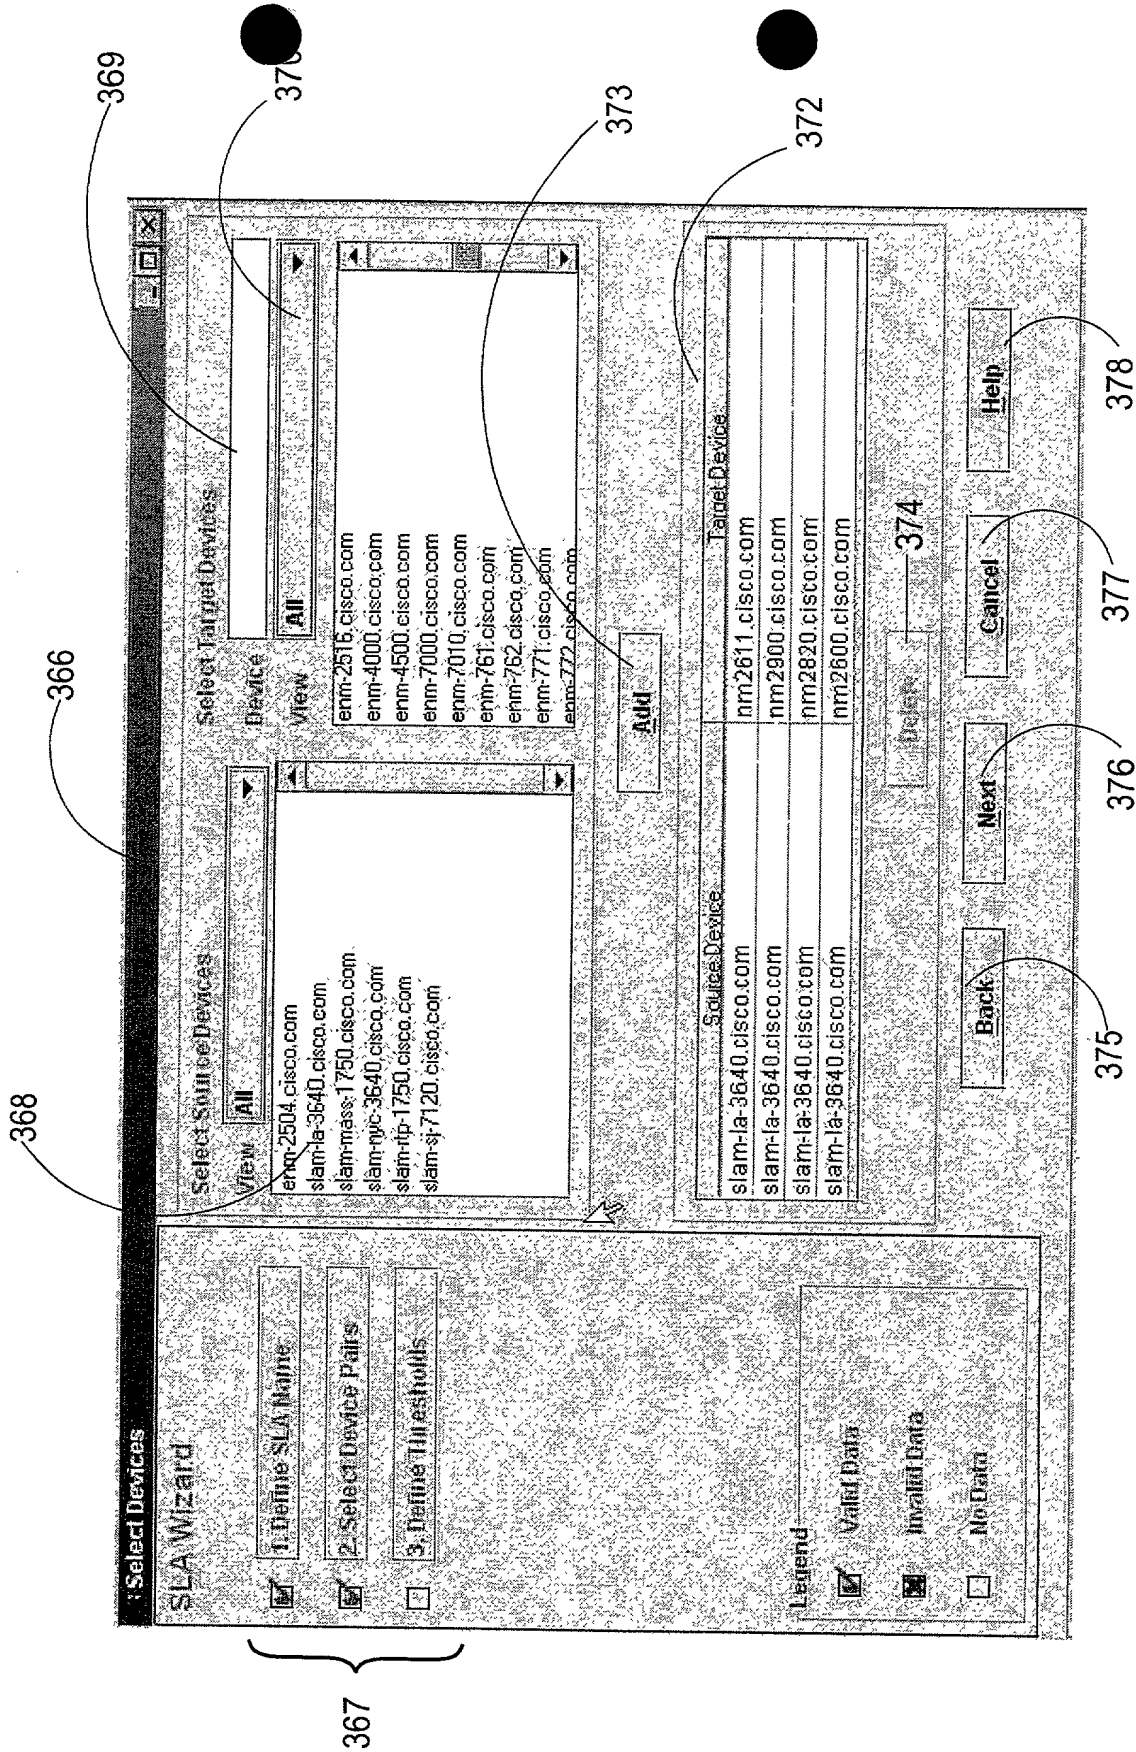


FIG. 3E

305

380

381

382

383

384

385

386

387

388

389

SLA Wizard

1. Define SLA Name

2. Select Device Pairs

3. Define Thresholds

Legend

☒ Valid Data

☒ Invalid Data

☐ No Data

Apply Mon all day, Tue all day, Wed all day, Thu all day, Fri all day, Sat all day, Sun all day

Round-Trip Latency

Daily Threshold

Latency shall not exceed 200 milliseconds average per hour

Monthly Threshold

Latency shall not exceed 200 milliseconds average per day

Availability

Daily Threshold

Daily average availability shall be at least 99.0 percent of a day

Monthly Threshold

Monthly average availability shall be at least 99.0 percent of a month

Back

Finish

Cancel

Help



FIG. 4

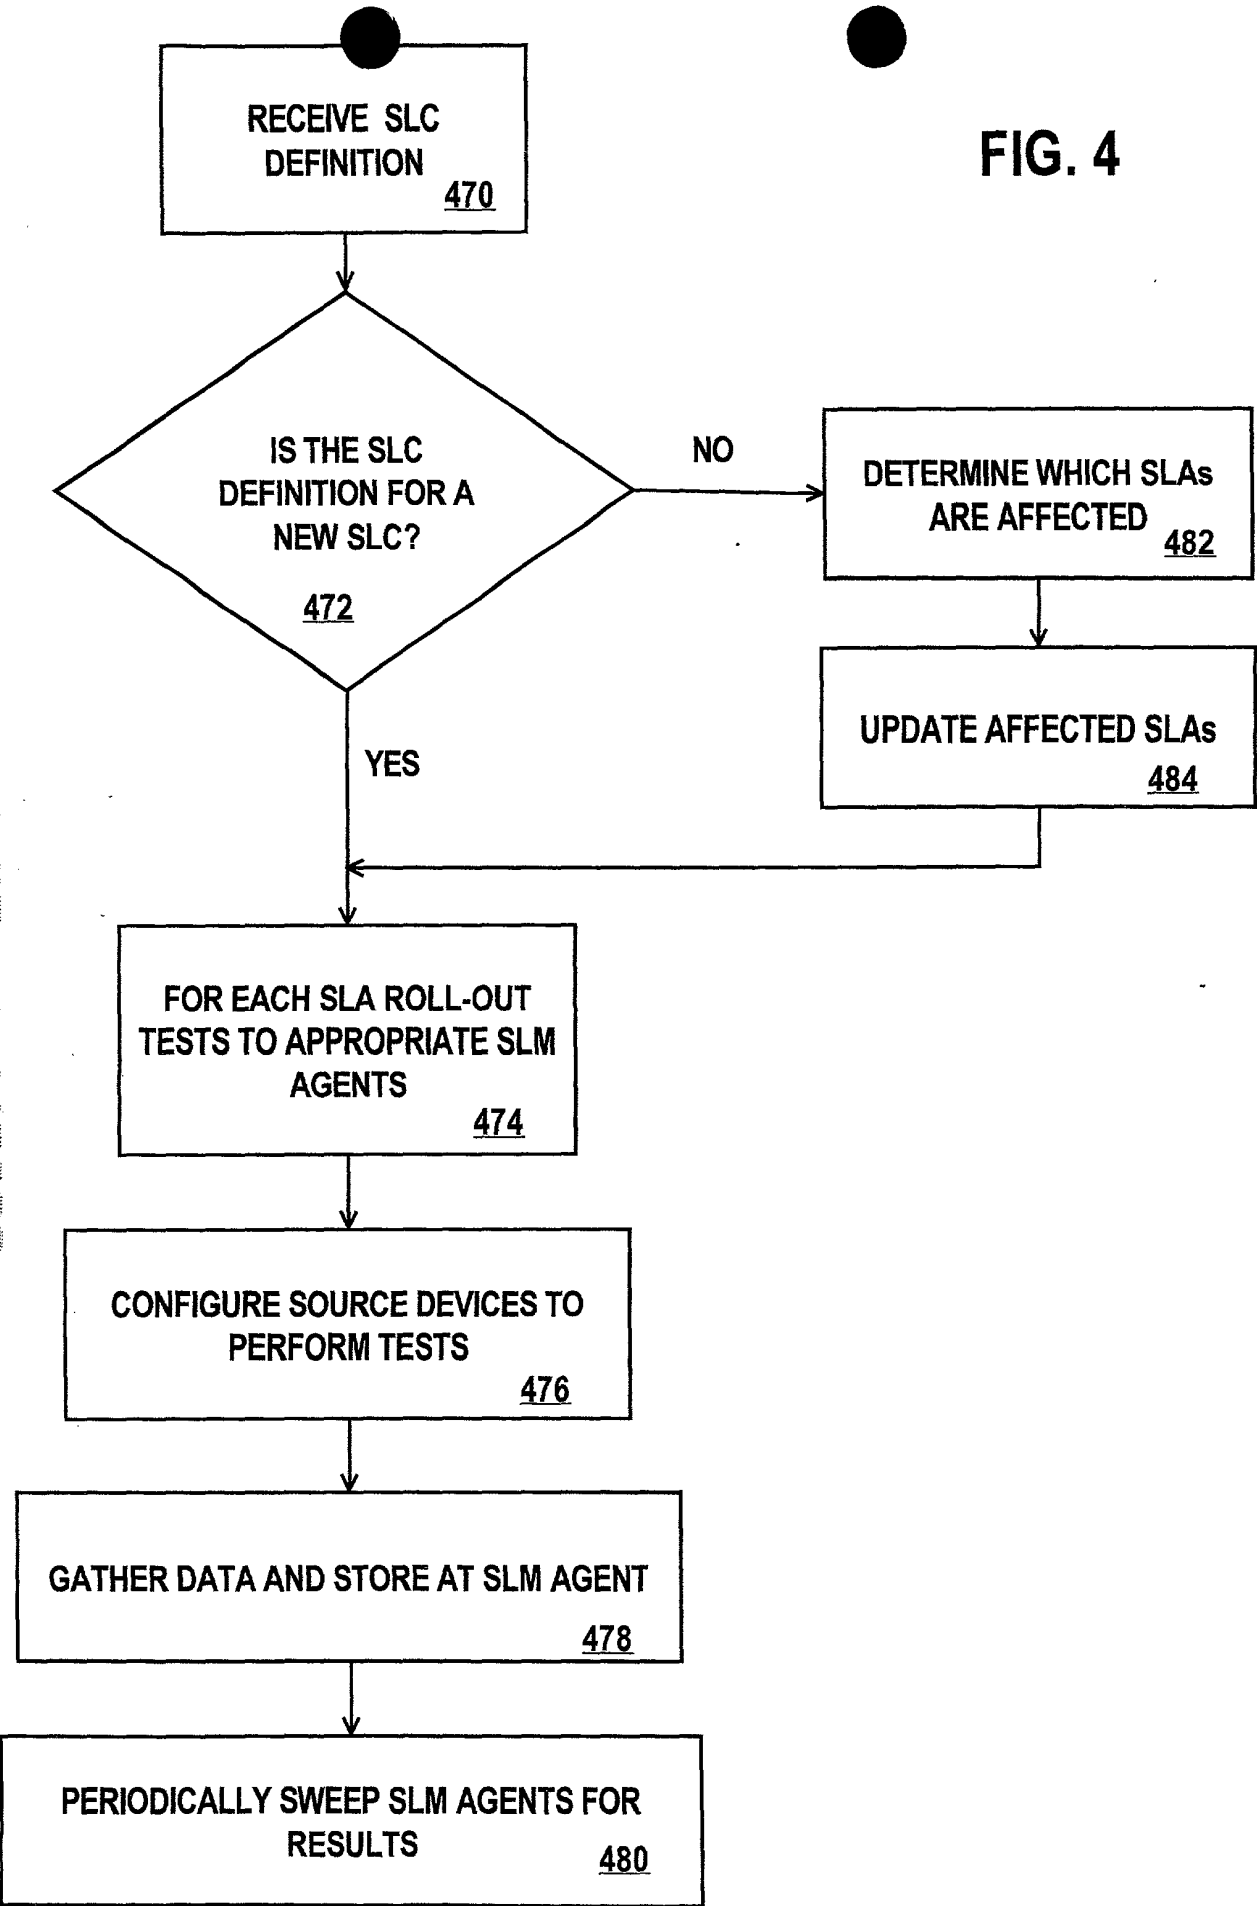


FIG. 5A

500

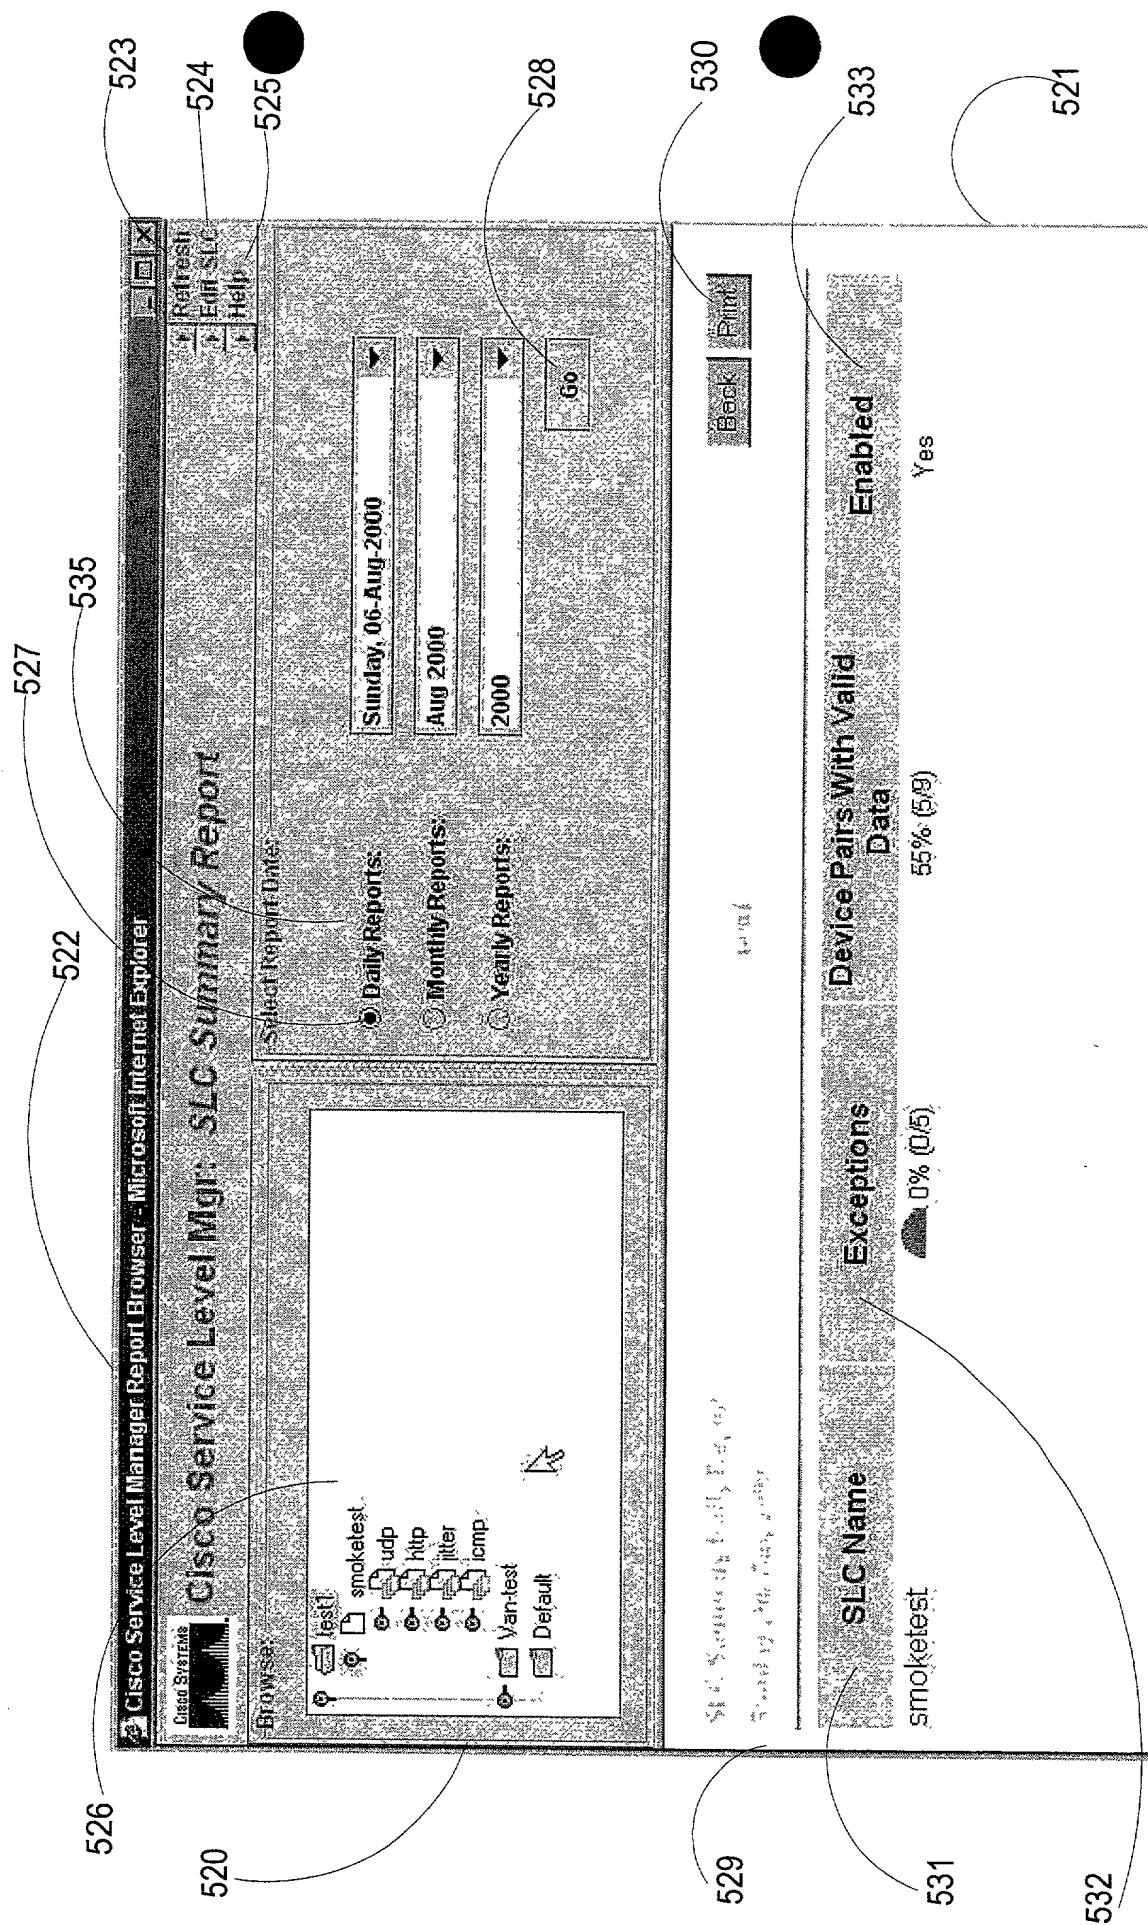


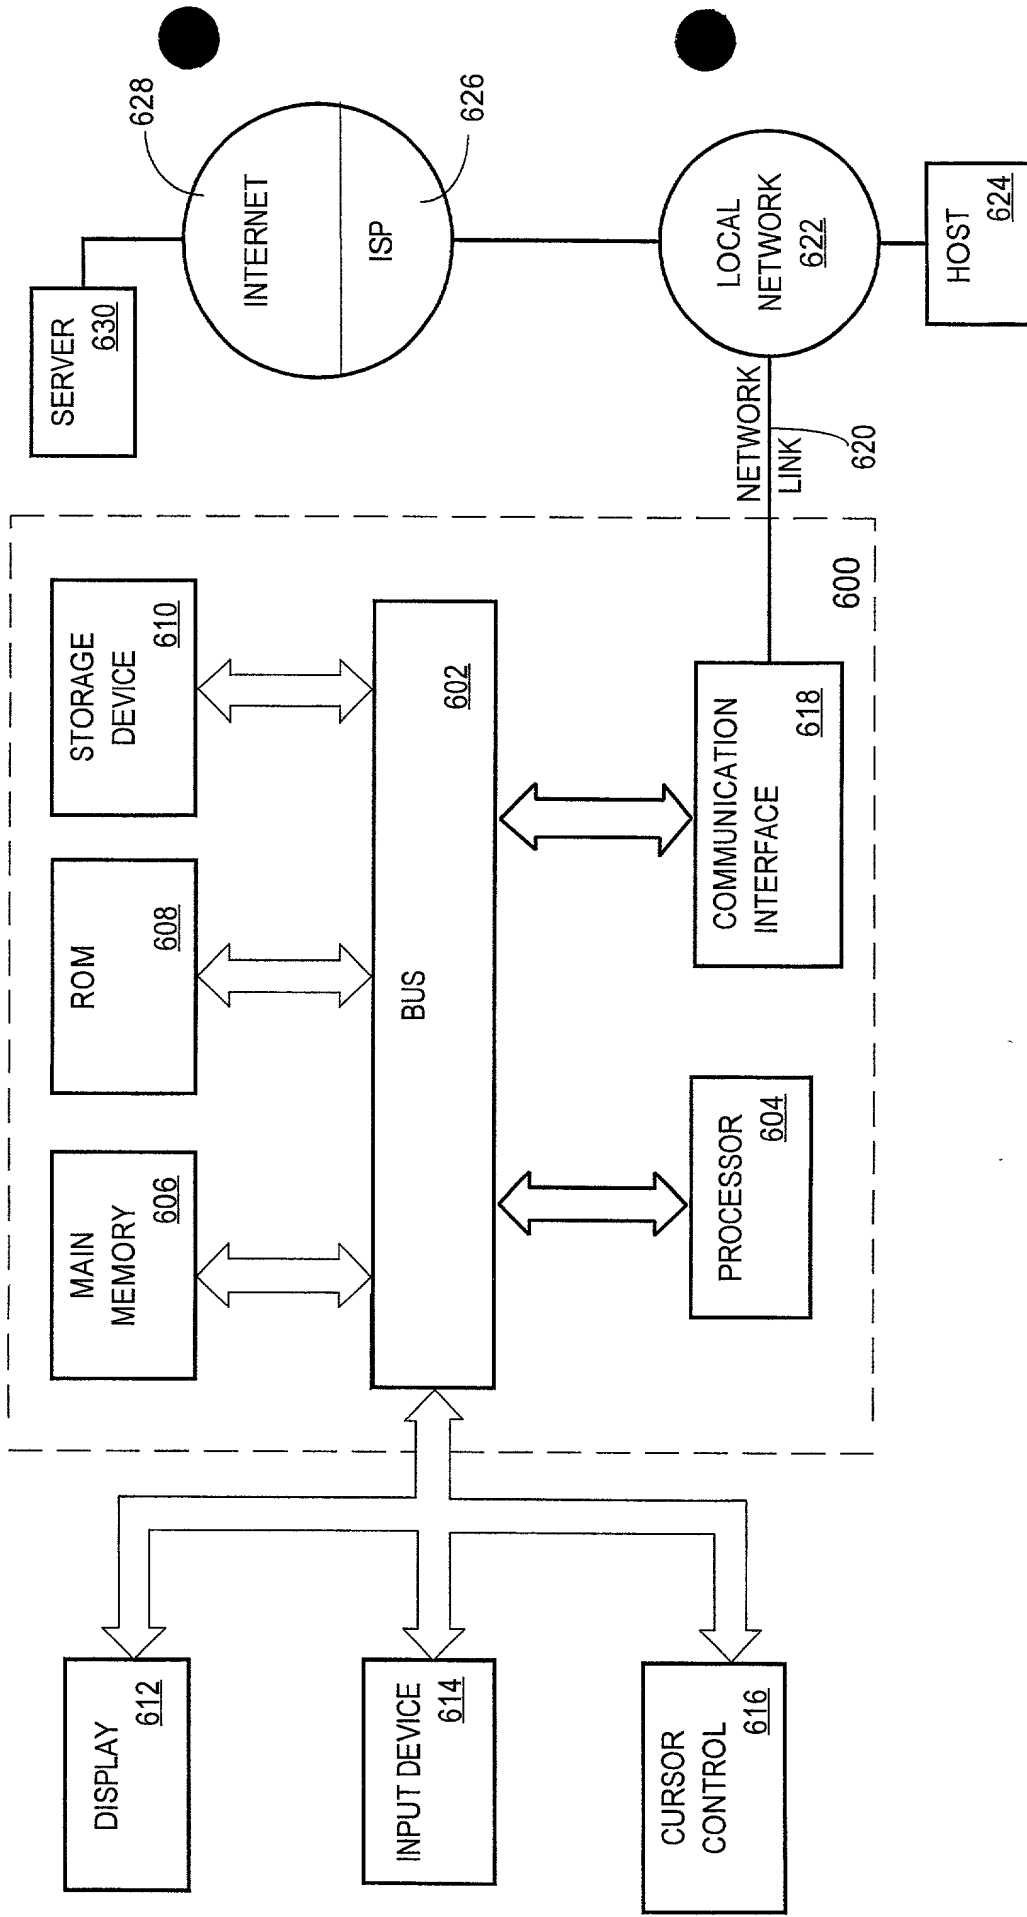








FIG. 6



# FIG. 7

700

